

PRODUCTS

9 Watt LED Light Bulb

This 9 watt dimmable LED light bulb is equivalent to a 60 watt incandescent bulb. It provides 25,000 hours of service, lasting up to 25 times longer and using 80% less energy than older incandescent bulbs. This LED bulb can be used in enclosed fixtures and are equipped with a 220° beam angle that produces even light from the socket base in a wide direction. This bulb also has a standard medium base which allows it to be easily installed into existing standard-sized lamps and fixtures.



Caulk Gun

This Caulk Gun has a steel body and holds a standard 10.3 oz cartridge. It is made of corrosion resistant epoxy and has a mechanical advantage of 6:1.




Acrylic Adhesive Silicone Sealant

This Acrylic Adhesive Silicone Sealant is ideal for sealing or setting windows, trim, doors, sinks, counters and a variety of substrates.

Closed-Cell Foam Weather-Strip (17' Roll)

This Adhesive-backed weather stripping, good for sealing out drafts in doors and windows.

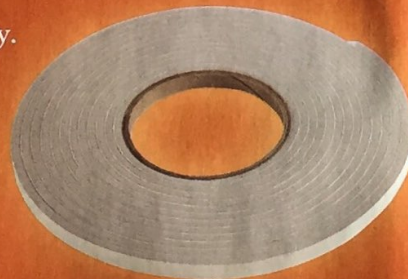

To Install:

1. Remove any existing tape.
2. Clean the surface and allow it to dry completely.
3. Cut the tape to desired length with scissors.
4. Press in place with fingertips.
5. Apply to the door frame with the creased side-facing the door on all sides.
6. Make sure the tape is compressed by the closed door.

Earth® Showerhead

This Earth® Showerhead saves money by using less water than traditional showerheads. It ensures drastic water usage reductions and features a nine-jet adjustable turbo massage that easily rotates from a gentle needle spray to a forceful jet.

To Install:

1. Remove the old showerhead from the shower arm by turning it counter-clockwise
2. Clean the shower arm threads, then turn on the water to wash out the pipe
3. Turn off the water
4. Apply a few layers of pipe tape directly to the shower arm threads in a clockwise direction
5. Apply the screen washer firmly onto the showerhead
6. Hand-tighten the showerhead onto the shower arm



Faucet Aerator

This aerator is made to fit standard sized bathroom and kitchen faucets. This product maintains great water pressure while saving water and energy.

To Install:

1. Remove old aerator from faucet
2. Before installing the new aerator, turn on the water to wash out the faucet
3. Turn off the water

Inside Threaded Faucets:

4. Place two rubber washers in the top of the aerator
5. Screw the aerator into the inside threads of faucet and hand-tighten

Outside Threaded Faucets:

4. Place one rubber washer in the top of the aerator.
5. Screw the aerator into the inside threads of faucet and hand-tighten

Note: Occasionally remove the aerator and rinse the pieces

